

## **AIRMAN8+**

AIRMAN8P-0210 DOUBLE SIDE ANR+ HEADSET, 2PJ, 600 OHM |  
AIRMAN8P-0211 DOUBLE SIDE ANR+ HEADSET, XLR5, 600 OHM





## Table of contents

<b>1</b>	<b>Front matter</b>	<b>4</b>
<b>2</b>	<b>Important!</b>	<b>5</b>
<b>3</b>	<b>Introduction</b>	<b>6</b>
<b>3.1</b>	FAA	<b>6</b>
<b>3.2</b>	Reference View	<b>9</b>
<b>4</b>	<b>Connection</b>	<b>10</b>
<b>5</b>	<b>Installation</b>	<b>12</b>
<b>5.1</b>	Plug the headset into the aircraft	<b>12</b>
<b>5.1.1</b>	Install the dual plug headset in an aircraft	<b>12</b>
<b>5.1.2</b>	Install the XLR plug headset in an aircraft	<b>12</b>
<b>5.2</b>	Adjust the headband	<b>13</b>
<b>5.3</b>	Adjust the microphone	<b>13</b>
<b>5.4</b>	Clothing clip assembly and attachment	<b>14</b>
<b>6</b>	<b>Operation</b>	<b>16</b>
<b>6.1</b>	ANR system	<b>16</b>
<b>6.2</b>	Headphone volume adjustment	<b>18</b>
<b>7</b>	<b>FAQ</b>	<b>20</b>
<b>7.1</b>	Troubleshooting	<b>20</b>
<b>7.2</b>	Label Information	<b>24</b>
<b>7.3</b>	Headband Information	<b>24</b>
<b>8</b>	<b>Maintenance</b>	<b>25</b>
<b>8.1</b>	Recommended maintenance schedule	<b>25</b>
<b>8.2</b>	Clean the headset and connectors	<b>25</b>
<b>8.3</b>	Clean the ear cushions and headband pads	<b>26</b>
<b>8.4</b>	Replace the ear cushions	<b>26</b>
<b>8.5</b>	Replace the headband pads	<b>28</b>
<b>8.6</b>	Replace the headband pad holder	<b>30</b>
<b>8.7</b>	Replace the hygienic covers	<b>30</b>
<b>8.8</b>	Replace the windscreen	<b>31</b>
<b>8.9</b>	Headset storage	<b>32</b>
<b>9</b>	<b>Technical data</b>	<b>33</b>

# 1 Front matter

## Proprietary notice

The product information and design disclosed herein were originated by and are the property of Bosch Security Systems, Inc. Bosch reserves all patent, proprietary design, manufacturing, reproduction, use and sales rights thereto, and to any article disclosed therein, except to the extent rights are expressly granted to others.

## Copyright Notice

All rights reserved. No part of this document may be reproduced or transmitted in any form by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of the publisher.

\*\*All other trademarks are property of their respective owners.

## Warranty and service

For warranty and service information, see <http://www.telex.com/warranty>.

## Customer support

Technical questions should be directed to:

Customer Service Department

Bosch Security Systems, Inc.

<http://www.telex.com/aviation>

Technical Support

Telex Aviation Technical Support - 1-800-898-6723

After-Sales Support - 1-800-553-5992

## Disclaimer

The manufacturer of the equipment described herein makes no expressed or implied warranty with respect to anything contained in this manual and shall not be held liable for any implied warranties of fitness for a particular application or for any indirect, special, or consequential damages. The information contained herein is subject to change without prior notice and shall not be construed as an expressed or implied commitment on the part of the manufacturer.

## 2 Important!

### Read Before Use

#### General

- Read this technical manual completely before using the product.
- This technical manual is also available at [www.telex.com/aviation](http://www.telex.com/aviation).

#### Health and Safety

- Always keep at least 4 in. (~10 cm) between the ear cups and a pacemaker or implanted defibrillator because this product generates magnetic fields.
- Keep away from children - product parts and accessories are a choking hazard.
- With **ANR** (Active Noise Reduction) active, typical aircraft sounds may not sound the same as when not using ANR. Before operating in an aircraft, verify ANR is active and you can hear and recognize sounds properly. Set the volume to a safe level that does not diminish your hearing of alarms and warnings.
- This headset is capable of producing sound pressure over 85 dB (A). In many countries, this is the maximum legal level for continuous noise exposure during the working day. To prevent hearing damage, do not listen at high volume levels for extended periods of time.

#### Preventing Damage and Malfunctions

- Always keep the headset dry and do not expose it to extreme temperatures to avoid corrosion or deformation.
- Never attempt to repair a headset which is not operating correctly. Contact the Telex dealer you purchased the headset through or an authorized repair facility.
- Only replace parts of the headset whose replacement is described within this manual. All other parts must be replaced by an authorized repair facility.

## 3 Introduction

The Telex Airman 8+ is a lightweight noise-reducing headset designed specifically for optimizing pilot communications in commercial and business turbine aircraft. Building on the tradition of the Airman 850 and the Airman 8, Airman 8+ has improved durability, intelligibility, and comfort. The Airman 8+ is among the lightest Active Noise Reduction headsets on the market and one of only three FAA TSO C139a approved ANR headsets to utilize Telex's proprietary battery-free system. Soft pliable ear cushions and headband pads combine with dual direction ear cup pivots to provide long flight wearing comfort.

- Flexible boom-mounted, noise-reducing microphone that can be positioned for right or left-side use.
- Lightweight, battery-free ANR with onboard fail-safe to ensure constant communication.
- Soft, pliable ear cushions and headband pads.
- Stainless steel headband and pivot points for superior durability.
- FAA TSO C139a approved.

### 3.1 FAA

The Telex Airman 8+ Headset is approved for aircraft use under FAA TSO-C139A. The conditions and tests required for the TSO approval of this article are minimum performance standards. It is the responsibility of those installing this article, either on or within a specific type or class of aircraft, to determine that the aircraft installation conditions are within the TSO standards. TSO articles may have separate approval for installation on aircraft. The article may be installed only if performed under 14 CFR part 43 or the applicable airworthiness requirements.

Tests were conducted per the minimum standards defined in RTCA DO-214A and DO-160G. The headset was designed and is manufactured to meet the following environmental categories.


**Environmental Qualification Form**

<b>Conditions</b>		<b>DO-160G Section</b>	<b>Description of Tests Conducted</b>
Temperature and Altitude		4.0	
	Ground Survival Low-Temp / Short-Time Operating Low-Temp	4.5.1	Equipment tested to Category A1
	Operating Low Temperature	4.5.2	Equipment tested to Category A1
	Ground Survival High-Temp & Short-Time Operating High Temp	4.5.3	Equipment tested to Category A1 with 70° C max exception by DO-214a 2.5.1.2
	Operating High Temperature	4.5.4	Equipment tested to Category A1
	In-Flight Loss of Cooling	4.5.5	Not Applicable
	Altitude	4.6.1	Equipment tested to Category A1/15000 ft.
	Decompression	4.6.2	Equipment tested to Category A1/45000 ft.
	Overpressure	4.6.3	Equipment tested to Category A1
Temperature Variation		5.0	Equipment tested to Category C
Humidity		6.0	Equipment tested to Category A
Operational Shock and Crash Safety		7.0	Not Applicable
Vibration		8.0	Equipment tested to Category S aircraft zone 2 (instrument panel or console mounting), Aircraft type 2 (Fixed Wing Turbojet or Turbofan engines), using vibration test curve B.
Explosive Atmosphere		9.0	Not Applicable
Waterproofness		10.0	Not Applicable
Fluids susceptibility		11.0	Not Applicable
Sand and Dust		12.0	Not Applicable
Fungus		13.0	Not Applicable

Conditions		DO-160G Section	Description of Tests Conducted
Salt Fog Test		14.0	Not Applicable
Magnetic Effect		15.0	Equipment tested to Category Z
Power Input		16.0	Equipment tested to Category A
Voltage Spike		17.0	Equipment tested to Category A
Audio Frequency Susceptibility		18.0	Not Applicable
Induced Signal Susceptibility		19.0	Equipment tested to Category ZC
Radio Frequency Susceptibility		20.0	Equipment tested to Category R
	Momentary RF	20.0	Equipment tested to Category R
	Steady State RF	20.0	Equipment tested to Category R
Emission of RF Energy		21.0	Equipment tested to Category M
Lightning Induced Transient Susceptibility (multiple burst)		22.0	Equipment identified as Category L2
Lightning Direct Effects		23.0	Not Applicable
Icing		24.0	Not Applicable
Electrostatic Discharge		25.0	Equipment tested to Category A
Fire, Flammability		26.0	Equipment tested to FAR PART25 and Appendix F <b>NOTE:</b> Some components not tested as they are considered small parts.
Wire Flammability			FAR, Wire tested to Part 25 and appendix F



## 3.2 Reference View

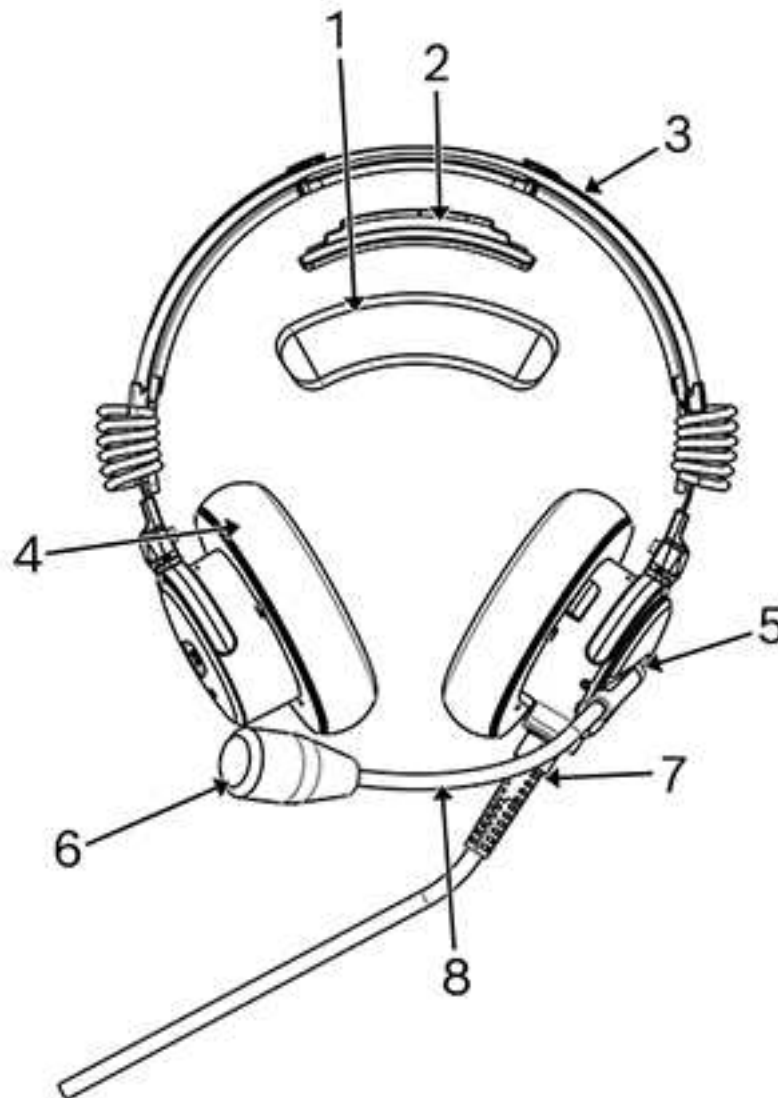

1. Headband Pad
2. Headband Pad Holder
3. Headset Gliders
4. Ear Cushions
5. Boom Rotator
6. Windscreen / Microphone
7. Boom
8. Cord with Strain Relief

## 4 Connection

Airman 8+ Series headsets are available with multiple connector styles depending on the application of use. All models utilize custom cables developed specifically for in cockpit use. All connection points implement strain and bend relief features to provide long-term durability. Shielded wire throughout the headset protects against **RFI** (Radio Frequency Interference) and **EMI** (Electromagnetic Interference).

### Dual-Plug

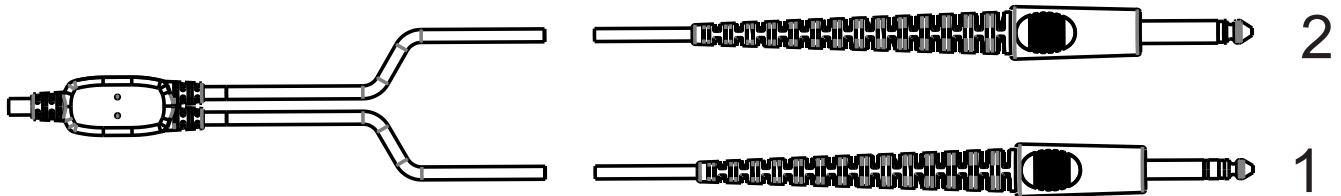


Figure 4.1: PJ Connector

1	PJ-068 or equivalent	Description
	Tip	Not Used
	Ring	Mic Signal (ANR Power +)
	Sleeve	Mic GND (ANR Power -)
2	PJ-055 or equivalent	Description
	Tip	Headphone Signal
	Sleeve	Headphone GND

### 5-Pin XLR Aircraft Cable

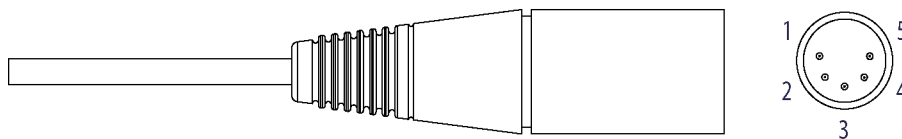


Figure 4.2: 5-pin XLR Connector

Pin	Description	Color
1	Headphone Signal	Yellow
2	Headphone GND	Black/Outer Shield
3	Mic Power and Signal (ANR Power +)	White
4	Mic Power and Signal (ANR Power -)	Blue/Inner Shield
5	ANR Power	Red

**Notice!**

The Airman 8+ automatically uses power from pin 5 if it is provided by the aircraft.

---

## 5 Installation

To install the headset for use, do the following:

1. Inspect the headset for signs of damage. Do not use the headset if signs of damage are evident.
2. Plug the headset into the aircraft console. For more information, see *Plug the headset into the aircraft, page 12*.
3. Adjust the headband. For more information, see *Adjust the headband, page 13*.
4. Adjust the mic for proper use. For more information, see *Adjust the microphone, page 13*.
5. Verify ANR is active. For more information, see *ANR system, page 16*.
6. Attach the clothing clip. Using the clothing clip reduces the cord weight from the headset. For more information, see *Clothing clip assembly and attachment, page 14*.



### Notice!

If required, adjust the volume, and then repeat steps 1 through 6.

### 5.1 Plug the headset into the aircraft

#### 5.1.1 Install the dual plug headset in an aircraft

To **install the dual plug headset in an aircraft**, do the following:

1. Insert the **microphone plug (smaller plug)** into the microphone jack on the aircraft audio panel.
2. Insert the **headset plug (larger plug)** into the headset jack on the aircraft audio panel.

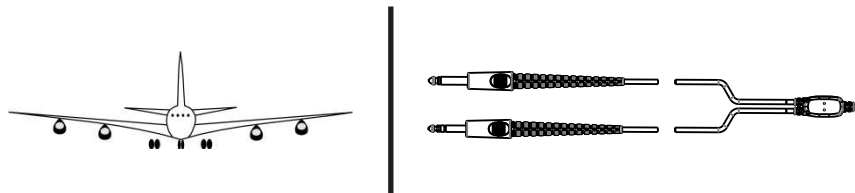


Figure 5.1: PJ Connector Installation

#### 5.1.2 Install the XLR plug headset in an aircraft

To **install the XLR plug in an aircraft**, do the following:

- ▶ Insert the **XLR plug into the XLR jack** on the aircraft audio panel, taking care to properly align the signal pins.

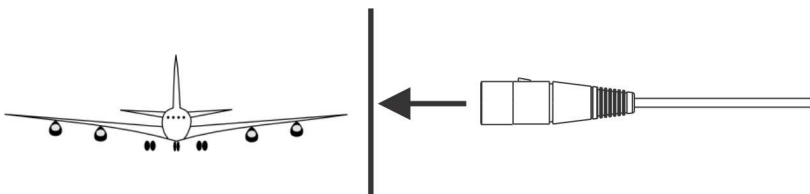


Figure 5.2: XLR Plug Installation

## 5.2 Adjust the headband

The Airman 8+ headset is designed to rest evenly on top of the head with each ear cup sitting centered and flush on each ear. The headset should fit over the head without pinching or gapping.

To **adjust the headband size**, do the following:

1. Secure the **headset** on the top of the head.
2. Slide **the ear cup up and down to center the ear cup over the ear**.



### Notice!

The headset works best when the headband pad is centered on the head. Both sides of the headset should be slid evenly for proper use.

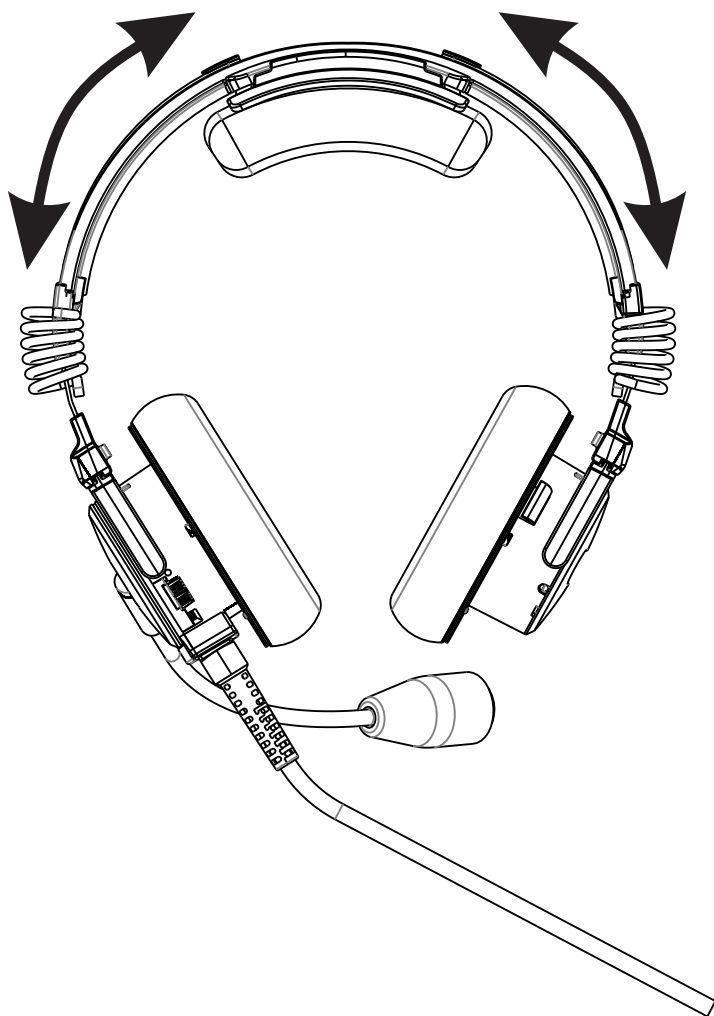


Figure 5.3: Headband Adjustment

## 5.3 Adjust the microphone

The headset ships with the boom positioned at the top of the headband.

To **adjust the boom**, do the following:

- ▶ Move the **entire boom** overhead to wear the mic on either the right or left side of the head.

**Caution!**

There are boom rotation stops on each side of the boom rotation. The boom mic is adjusted upward to move to the other side of the headset.

Do not adjust the boom past the built-in stops. Adjusting the boom past the built-in stops will damage the microphone.

To **properly place the mic**, do the following:

1. Move the **boom** to the preferred side of the headset.
2. Bend the **boom** to put the mic in front of the mouth.

**Notice!**

For best noise-cancelling quality, put the boom mic as close to the mouth as possible and talk into the mic.

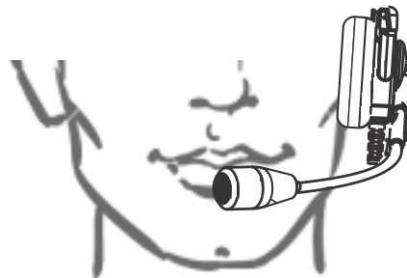


Figure 5.4: Mic Placement

## 5.4

### Clothing clip assembly and attachment

Using the clothing clip reduces the cord weight from the headset. The clothing clip comes attached to the cord and only needs to be adjusted up or down, for best use.


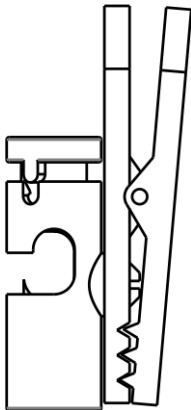


Figure 5.5: Clothing Clip

To **assemble the clothing clip**, do the following:


1. Align the **notch**

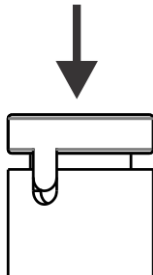

2. Depress the **button**.
3. Thread the **headset cable through the cable tunnel**.




4. Release the **button** to secure the cable.

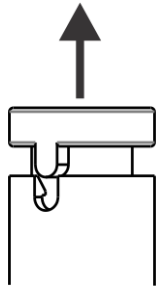

To **attach the clothing clip**, do the following:

1. Pinch the **levers** together to open the clip.

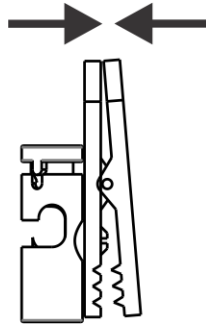

1. Attach the **clip** to the clothing. Allow enough slack in the cable for movement.
2. Release the **clip** to secure it to your clothing.

## 6 Operation


### 6.1 ANR system

**ANR** (Active Noise Reduction) is used to reduce unwanted noise in the headset from the surrounding environment. By reducing unwanted background noise, the user is able to reduce the volume level of the intended sounds providing more intelligible communications and long term hearing safety. It uses power obtained from the aircraft through the boom microphone connection (microphone bias voltage) or pin 5 of the XLR connection, if available. The ANR system only works properly when power is continuously received from the aircraft. If power to the headset is lost, the failover system automatically reroutes audio to the speaker so you can still hear communications, even though ANR is not functioning properly.



#### Notice!

ANR is only available when power is applied to the microphone or pin 5 of the XLR connection. When conditions allow for power only during push-to-talk, keep the ANR power switch in the off position. Leaving the ANR power switch in the on position in these intermittent power conditions can result in unintended ANR performance.

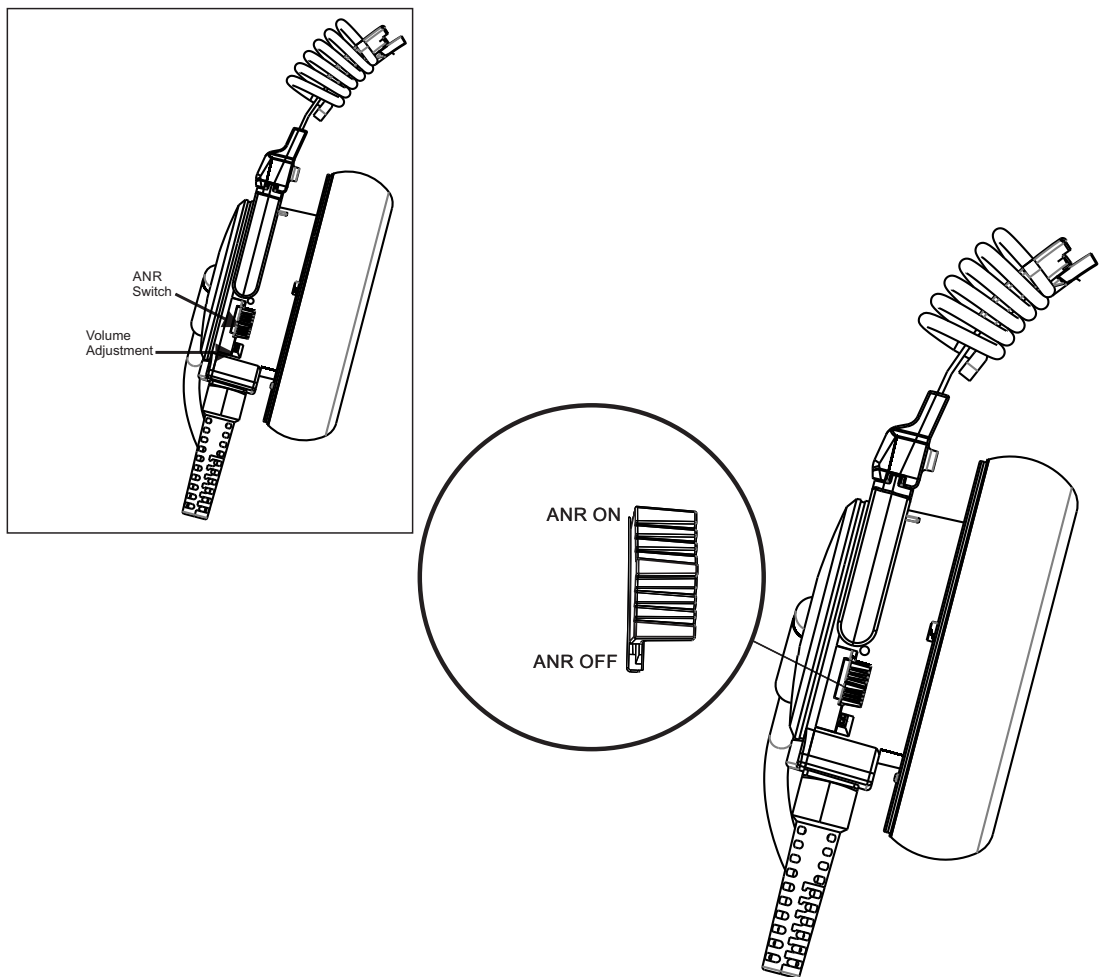

**Figure 6.1:** ANR Switch



**Notice!**

The ANR switch ships in the on position and usually does not need to be turned off.

---

To **start ANR**, do the following:

- ▶ Move the **ANR switch** into the up position (located on the ear cup with the mic).

## 6.2 Headphone volume adjustment

The Airman 8+ is equipped with a headset volume adjustment switch. When required, the user can increase or decrease the headphone volume level by moving the switch from normal to high.




### Notice!

The Airman 8+ is shipped in the normal position and functions properly with most avionics equipment. Under normal circumstances, volume adjustment is not required. The volume adjustment only affects the headphone volume, not the boom mic. If the high setting is used, the boom mic sidetone level may seem low. If so, it should be adjusted on the radio or intercom to compensate.



### Caution!

The headset is capable of producing high SPLs (Sound Pressure Levels). High volumes and/or long durations can damage hearing.

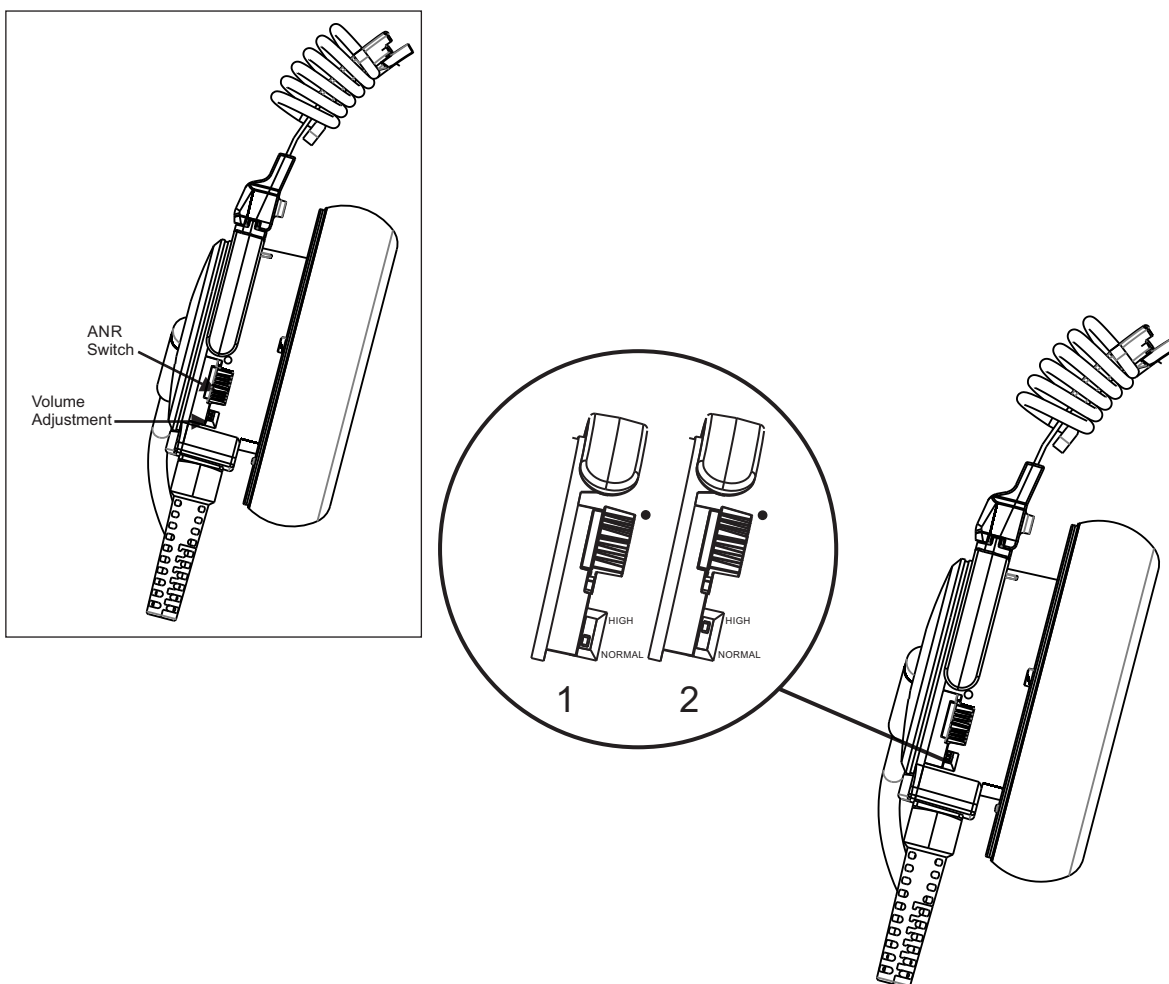

**Figure 6.2:** Volume Switch

**Notice!**

Because this switch is inside the headset, use a small pointed object, such as a paperclip, to change the switch setting.

---

## 7 FAQ

### Refer to

- *Replace the windscreen, page 31*
- *Headphone volume adjustment, page 18*
- *Replace the ear cushions, page 26*
- *Adjust the microphone, page 13*
- *Adjust the headband, page 13*

## 7.1 Troubleshooting

Issue	Possible Cause	Solution
No one can hear me when I talk	Microphone not connected correctly.	Make sure the microphone is plugged in correctly. Make sure there are no breaks or damage to the cord. (If damaged, headset needs to be serviced.)
	Microphone is not placed correctly.	Reposition microphone to correct location closely to the front of the mouth. For more information on mic placement, see <i>Adjust the microphone, page 13</i> .
	Intercom system is not adjusted properly, not functioning, or compatible with microphone.	Authorized avionics technician needs to make sure compatibility and proper function of the intercom.
	Microphone gain is not adjusted properly.	Authorized avionics technician or repair facility needs to adjust and test microphone amplifier.
	Microphone is not functioning.	Return headset to an authorized repair center for maintenance.
Others only hear me sporadically or my voice is distorted and unintelligible	Microphone is not placed correctly.	Reposition microphone to correct location, close to the front of the mouth. Also, try rotating microphone to assure proper orientation. For more information on mic placement, see <i>Adjust the microphone, page 13</i> .

Issue	Possible Cause	Solution
	Microphone windscreen is missing or needs to be replaced.	Replace the windscreen. For more information on windscreen replacement, see <i>Replace the windscreen, page 31</i> .
	Pilot is speaking too loudly or too quietly into the microphone.	Alter speaking level. Increase the sidetone level on the radio or intercom.
	Intercom system is not adjusted properly, not functioning, or compatible with microphone.	Authorized avionics technician needs to make sure compatibility and proper function of the intercom.
	Microphone gain is not adjusted properly.	Authorized avionics technician or repair facility needs to adjust and test microphone amplifier.
	Microphone is not functioning.	Return headset to an authorized repair center for maintenance.
I cannot hear anyone who is trying to speak to me	Headphones not connected correctly.	Make sure the microphone is plugged in correctly. Make sure there are no breaks or damage to the cord.
	Headphones are not worn properly	Reposition headphones to ensure properly covering the ear. For more information on proper position, see <i>Adjust the headband, page 13</i> .
	Intercom system is not adjusted properly, not functioning, or compatible with headphones.	Authorized avionics technician needs to make sure compatibility and proper function of the intercom.
	Headphone volume setting is not adjusted properly.	Adjust volume, as required (if equipped). For more information on volume adjustment, see <i>Headphone volume adjustment, page 18</i> .
	Headphones are not functioning.	Return headset to authorized repair center for maintenance.

Issue	Possible Cause	Solution
	Sidetone volume levels are not correct (only applies to not being able to hear yourself over sidetone.	Adjust the sidetone level on the intercom or radio system, if applicable. The headset does not create or modify sidetone level.
I hear others only sporadically or what I hear is distorted and unintelligible	Headphones have poor connection to the aircraft.	Check and clean connectors and re-connect to the aircraft.
	Headphones are not worn properly	Reposition headphones to ensure properly covering the ear. For more information on proper position, see <i>Adjust the headband, page 13.</i>
	Headphone ear cushions are missing or need to be replaced.	Replace ear cushions.
	Intercom system is not adjusted properly, not functioning, or compatible with headphones.	Authorized avionics technician needs to make sure compatibility and proper function of the intercom.
	Headphone volume setting is not adjusted properly.	Adjust volume, as required (if equipped). For more information on volume adjustment, see <i>Headphone volume adjustment, page 18.</i>
	Headphones are not functioning.	Return headset to authorized repair center for maintenance.
Headphones are not blocking background noise	ANR power switch is not set to the on position.	Switch the ANR power switch to the on position.
	Power is not being received from the aircraft.	Have an authorized avionic technician make sure the microphone is powered correctly.
	Ear cushion is not properly installed.	Make sure ear cushions are properly installed or replace, if damaged. For more information on ear cushion replacement, see <i>Replace the ear cushions, page 26.</i>

Issue	Possible Cause	Solution
	Headphones are not worn properly	Reposition headphones to ensure properly covering the ear. For more information on proper position, see <i>Adjust the headband, page 13</i> .
	ANR system is not functioning.	After verifying all proper connections and microphone is provided needed power, then return headset for repair.
	ANR function is not compatible with Aircraft systems.	Contact Bosch customer service to determine if there are any known compatibility issues.
	Aircraft has a grounding or other system related problem.	Authorized avionics technician needs to make sure all grounding of avionics systems is connected properly.
Headphones are oscillating, creating unexpected noise, or are only blocking background noise intermittently	Power is not being receive from the aircraft.	Authorized avionics technician need to make sure the microphone is working.
	Headset is not working.	Verify the connectors are clean and not damaged and ensure the connectors are fully inserted.
	Ear cushion is not properly installed.	Make sure ear cushions are properly installed or replace, if damaged. For more information on ear cushion replacement, see <i>Replace the ear cushions, page 26</i> .
	Headphones are not worn properly	Reposition headphones to ensure properly covering the ear. For more information on proper position, see <i>Adjust the headband, page 13</i> .
	ANR system is not functioning.	After verifying all proper connections and microphone is provided needed power, then return headset for repair.

Issue	Possible Cause	Solution
	ANR function is not compatible with Aircraft systems.	Contact Telex customer service to determine if there are any known compatibility issues.

## 7.2 Label Information

The Datamatrix ECC200 holds the following information:

- CTN Number
- Serial Number
- SAP Part Number

## 7.3 Headband Information



Figure 7.1: Example Headband

1	CTN/Model Number
2	Serial Number (in format YYWW####)



## 8 Maintenance

### 8.1 Recommended maintenance schedule



**Notice!**

Ear cushions, headband pads, and microphone wind screens are considered wear items. For proper headset performance, these items need to be inspected and replaced at regular intervals. See the maintenance schedule below for more information. Headset performance diminishes if items are not replaced when deterioration or damage is apparent.

Tasks	Per Use	Monthly	6 Months
Check boom mic placement	X		
Check ear cup placement	X		
Check headband fit	X		
Inspect and clean connectors			X
Clean ear cushions		X	
Clean headband pad		X	
Check connection cable		X	
Inspect & replace windscreen			X
Inspect & replace ear cushions			X
Inspect & replace headband pad			X

### 8.2 Clean the headset and connectors



**Notice!**

Do not allow alcohol or any liquid to touch the speaker or microphone element directly.

To **clean the headset**, do the following:

- ▶ Clean the **plastic and metal headset parts** with a mild detergent with water and a soft towel or isopropyl alcohol wipes.



**Notice!**

Do not soak or allow liquid to puddle on the unit.

## 8.3 Clean the ear cushions and headband pads



### Notice!

Do not soak cushions or pads.

To **clean the ear cushions and headband pads**, do the following:


- ▶ Gently wipe the **ear cushions** and **headband pad** thoroughly with a damp (not wet) soft towel or isopropyl alcohol wipe.

## 8.4 Replace the ear cushions


To ensure optimal product performance, it is recommended you replace ear cushions and headband pads periodically (every six months, or sooner if needed).

To **remove the ear cushions**, do the following:


1. Grasp the **edge of the ear cushion** where it folds into the slot on the ear cup.
2. Gently pull the **ear cushion up and away** from the ear cup.
3. Attach the **new cushion** at the top of the ear cup.

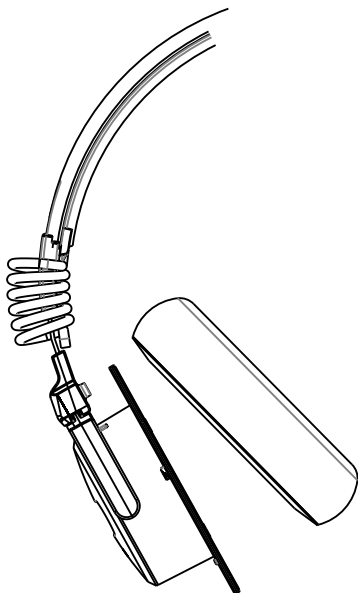

4. Work the **cushion** around the ear cup.

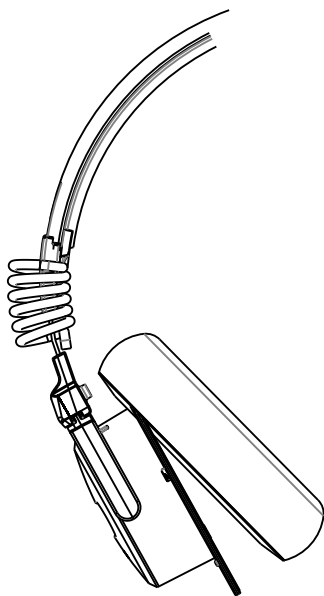

5. Secure the **cushion in place** around the bottom of the ear cup.

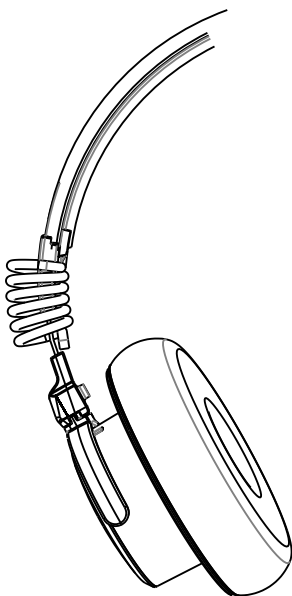

6. Make sure the **cushion is seated properly** on the ear cup.

## 8.5 Replace the headband pads

To **remove the headband pads**, do the following:

1. Grasp the **edge of the headband pad**.
2. Gently pull the **headband pad away from the headband**.



To **replace the headband cushions**, do the following:

1. Align the **headband pad** with the recessed area on the headband.



2. Firmly press the **headband cushion** into place.

## 8.6 Replace the headband pad holder

The Airman 8+ comes with two headband pads, a small one and a large one.

To **replace the headband pad**, do the following:

1. Slide the existing **headband pad holder** left or right to remove it from the headband.
2. Align and push the **smaller headband pad holder** onto the headband.

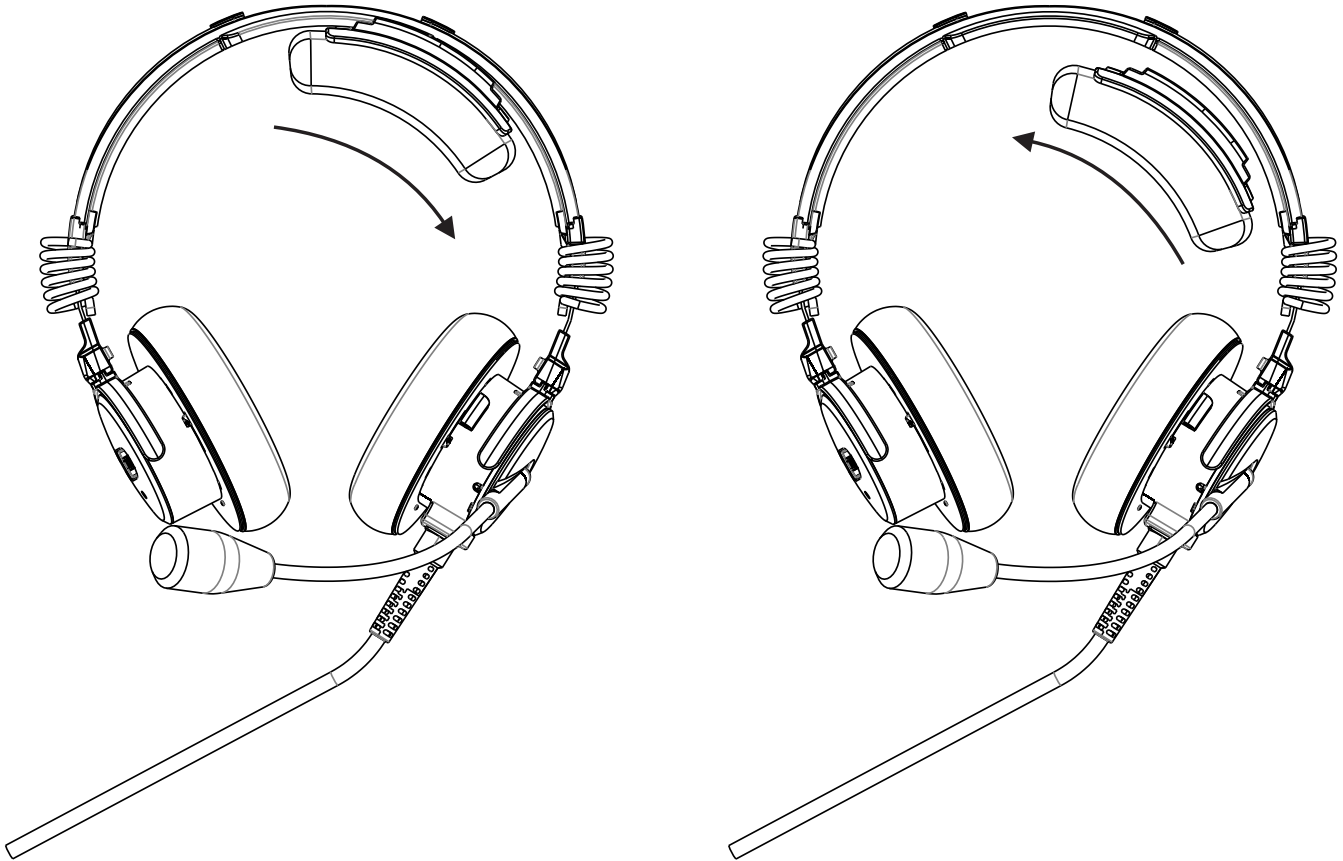


Figure 8.1: Replace the Headband Pad Holder

## 8.7 Replace the hygienic covers



### Notice!

Two hygienic covers are included with the headset. Extra hygienic covers can be purchased separately.

To **replace the hygienic covers**, do the following:

1. Grasp the **edge of the hygienic cover** where folds into the slot on the ear cup.
2. Gently pull the **hygienic cover** up and away from the ear cup.
3. Carefully work the **new cover** (starting at the top of the ear cup) around the ear cup until it is in place.

## 8.8 Replace the windscreen

The foam windscreen can be cleaned using low pressure air to blow contaminants off from the exterior. If low pressure air does not provide effective results, the windscreen should be replaced.




### Notice!

Do not use any liquid on the foam windscreen.

To **remove the windscreen**, do the following:

- ▶ Grasp the **microphone windscreen** and gently pull away from the microphone.


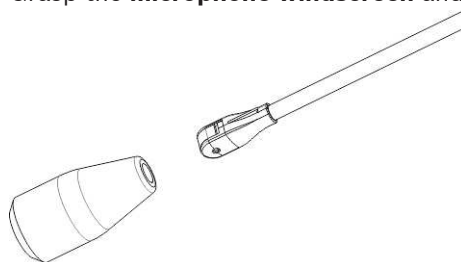


To **replace the windscreen**, do the following:

- ▶ Slide the **new windscreen** over the microphone.

## 8.9

### Headset storage

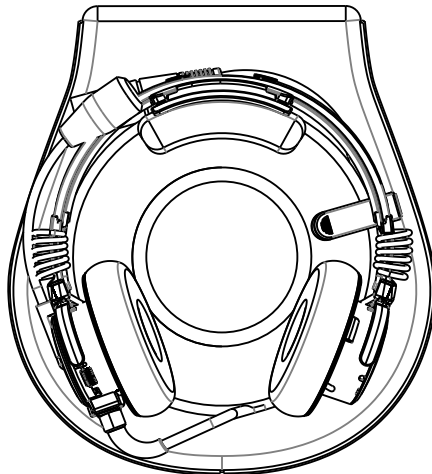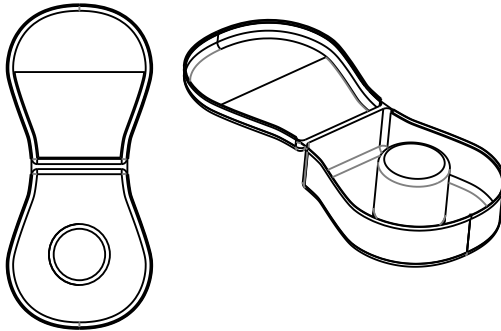

**Figure 8.2:** Airman 8+ carrying case

To **store the headset**, do the following

1. Move the **boom mic** above the headband.
2. Wind the **cord** into a loop.
3. Place the **coiled cord and headset** in the carrying case.



# 9 Technical data

<b>Headphones</b>	
Type:	
	Dynamic
Impedance:	
	600 Ω ±20% @ 1 kHz
Frequency Response: (Per RTCA DO-214a)	
	< 15 dB max. to min. over the range 315 to 3150 Hz
Sensitivity (Per RTCA DO-214a)	
	92 dB ±5 dBSPL (normal) 98 dB ±5 dBSPL (high)
<b>Microphone and Amplifier</b>	
Element Type:	
	Noise-canceling amplified electret
Frequency Response: (Per RTCA DO-214a)	
	<div style="text-align: center;"> <p style="text-align: center;">Typical Normalized Frequency Response</p> </div>
Sensitivity: (Per RTCA DO-214a)	
	-28 dB ±3 re 1 V/Pa at 1 kHz, 12 V via DO-214a 2.6.2.1
Operating Voltage: (Per RTCA DO-214a)	
	8 to 28 VDC (470 Ω TSO load circuit) or 8-28 VDC supplied on pin 5 of the XLR connector if provided by the aircraft.

ANR			
Power Supply:			
Receives power from either boom microphone connection (see operating voltage above) or 8-28 VDC supplied on pin 5 of the XLR connector if provided by the aircraft.			
Attenuation:			
Provides nominal noise reduction 18 dB or higher between 100 Hz and 400 Hz and 15 dB (minimum) of attenuation between 100 Hz and 300 Hz.			
<b>Connector Type</b>			
For model AIRMAN8P-0210 Dual Plug Connector			
	Microphone:	PJ-068 or equivalent	
	Headphones:	PJ-055 or equivalent	
For model AIRMAN8P-0211			
	Microphone and Headphones:	5-pin Male XLR	
<b>Physical</b>			
Weight:			
		Headset weight (with cord)	Headset weight (without cord)
	AIRMAN8P-0210 (Dual plug)	6.77 oz (192 g)	4.4 oz (125 g)
	AIRMAN8P-0211	6.70 oz (190 g)	4.4 oz (125 g)
Cord Length:			
	6 ft. ±4 in. (1.8 m ±10 cm)		
Color:			
	Black and stainless steel		
Controls:			
	Active Noise Reduction On/Off Switch		
	Volume Normal/High Switch		

**Part Number Information**

<b>CTN</b>	<b>Item Type</b>	<b>Description</b>
AIRMAN8P-0210		Double Side ANR Headset, 2PJ, 600 Ohm
AIRMAN8P-0211		Double Side ANR Headset, XLR5, 600 Ohm
AIRMAN8P-0908	Replacement	Headband Pad for Airman 8+
AIRMAN8P-0903	Replacement	Ear Cushion for Airman 8+, 2 pcs
AIRMAN7-0900	Replacement	Windscreen for Airman 7/8/8+, 2pcs
AIRMAN7-0904	Replacement	Clothing Clip for Airman 7/8/8+
AIRMAN8P-0909	Replacement	Carry Case for Airman 8+
AIRMAN8P-0910	Replacement	Hygiene Cover for Airman 8+, 10 pcs





**TELEX**



F 0 1 U 3 8 0 8 1 8

**TELEX**

12000 Portland Avenue South  
Burnsville MN 55337  
USA

**[www.telex.com](http://www.telex.com)**

© Bosch Security Systems, LLC, 2021